




# CBS-4 from \$630

**Arch Kit Includes:**

- Assembled Arch Top with Keys—Arch Top manufactured from MDF (Medium-Density Fiberboard)
- 2 Unassembled Columns - solid Poplar - Precut - Ready to Assemble - Fluted Casing Standard
- Sheetrock Template
- Ready to be Primed and Painted - Paint Grade Only
- **Optional for Columns:** Curved Header Casing may be substituted for Fluted Casing on columns
- Available in Elliptical Shape Only
- Column Upgrade Available!

**Arch Kit Parts Detail:**

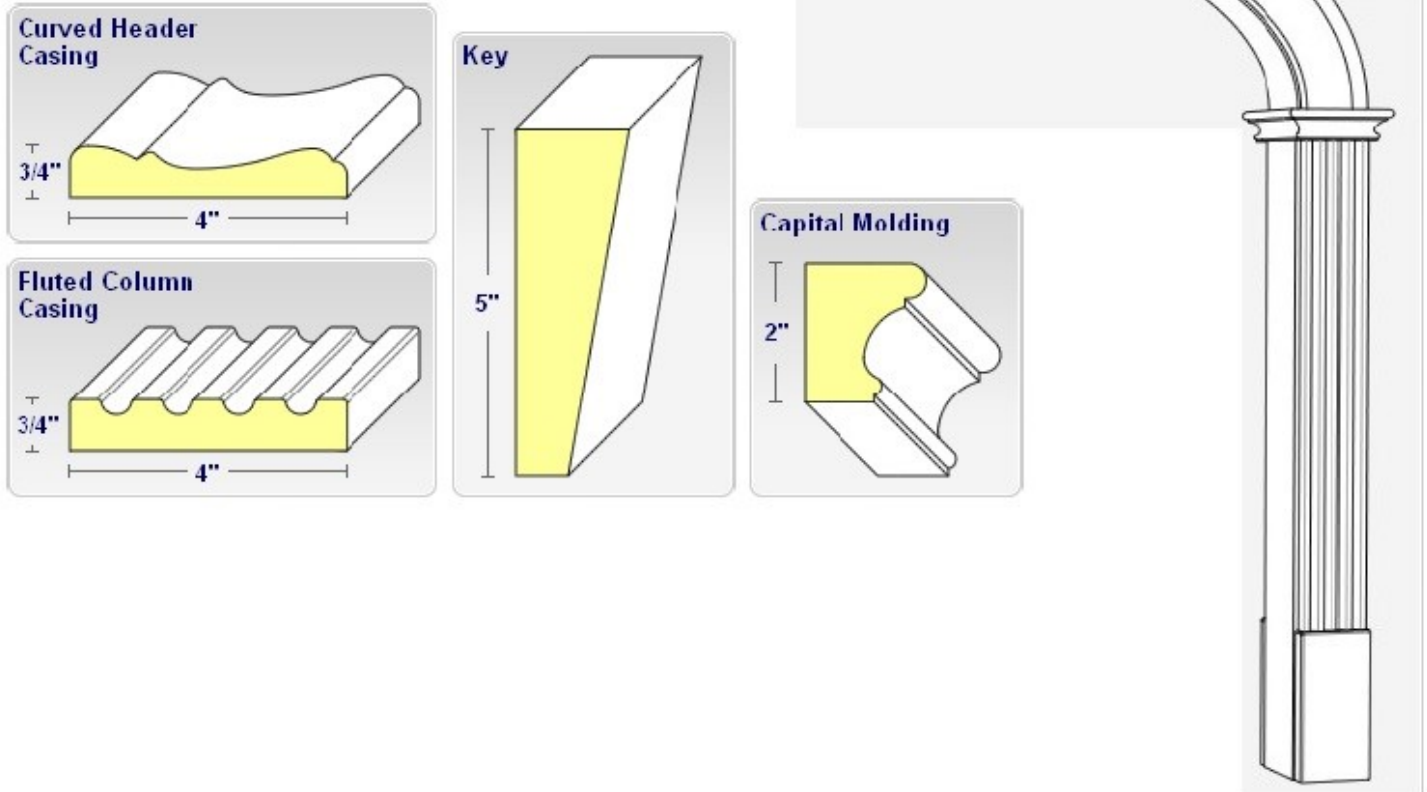


Finished Width Size	Elliptical Price	RoundTop Price
28, 30, 32, 34, 36, 40, 42, 45, 48	\$630.00	N/A
51, 54, 57, 60, 63, 66, 69, 72	\$695.00	N/A
75, 78, 81, 84, 87, 90, 93, 96	\$845.00	N/A

Sizes Larger than 96" and in between sizes can be ordered! — call or email for pricing

Prices assume standard 4 5/8" jamb—CUSTOM SIZES MAY BE ORDERED (additional costs may apply)

Shipping/handling quoted on a per-order basis

## CBS-4 Framing Information

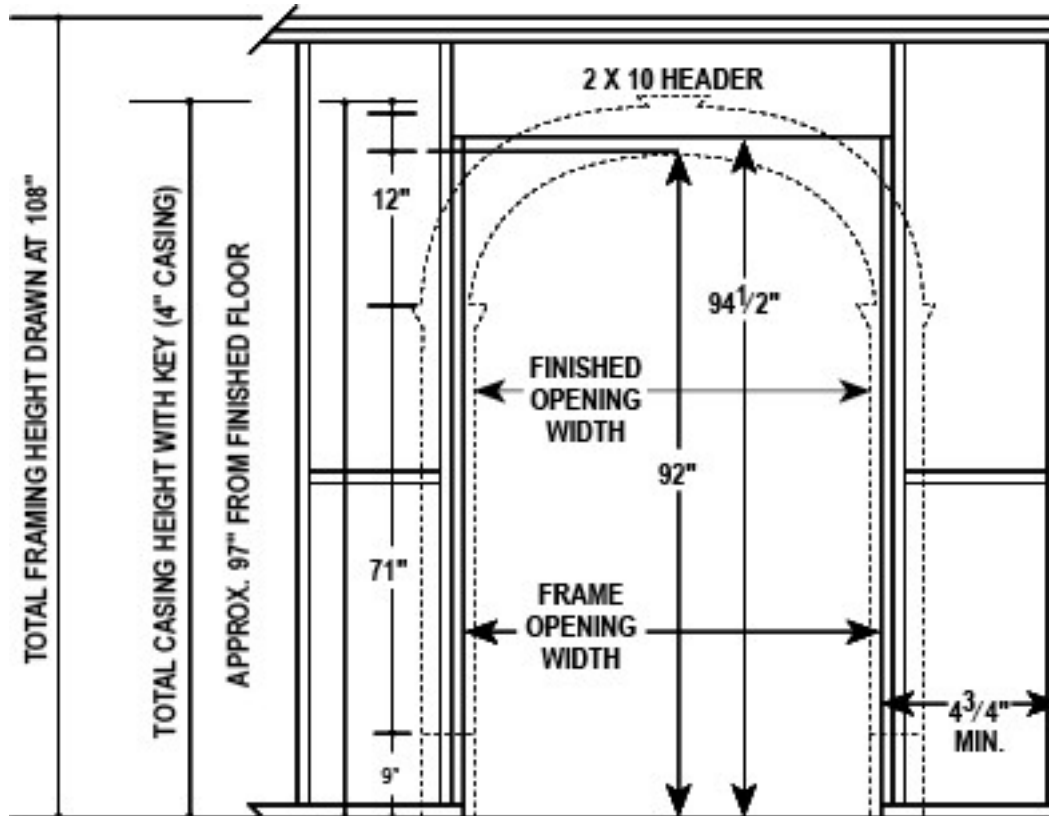

- Capital extends 1-1/8" from back edge of molding.
- Plinth base capital extends 1-5/8" from back edge of casing.
- Light switch boxes should be mounted minimum of 4 1/2" from rough opening.
- \*Subtract 12" off all vertical measurements when using 8' ceilings.
- Finished opening heights are standard 92" or 96" from finished floor for 9' ceilings and 80" for 8' ceilings.
- Minimum distance of framed opening to corner is 4 3/4". This allows for 3/4" thick baseboard with 1/2" return.
- Frame opening width is finished opening width +2". (38" framed opening for 36" finished opening)
- IMPORTANT FOR NEW CONSTRUCTION! To ensure proper sheetrock installation, toenail a 2x4 15" below the header height on both sides. No corner bracing is necessary.

# CBS Colum Upgrade Option - from \$825

